

Engineering Specification

Job Name _____
 Job Location _____
 Engineer _____
 Approval _____
 Tag _____

Contractor _____
 Approval _____
 Contractor's P.O. No. _____
 Representative _____

CO-100-C-US Floor Cleanout with Square Top, Terrazzo Recess

Specification

Watts CO-100-C-US epoxy coated cast iron cleanout with anchor flange, reversible membrane clamp, and adjustable combined access cover and plug with gasket seal.

| Pipe Sizing | | |
|-------------|-------------------|--------------------------|
| Suffix | Description | |
| 2 | 2"(51) Pipe Size | <input type="checkbox"/> |
| 3 | 3"(76) Pipe Size | <input type="checkbox"/> |
| 4 | 4"(102) Pipe Size | <input type="checkbox"/> |
| 6 | 6"(152) Pipe Size | <input type="checkbox"/> |

| Outlet Type | | |
|-------------|-----------------|--------------------------|
| Suffix | Description | |
| NH | No Hub (MJ) | <input type="checkbox"/> |
| P | Push On | <input type="checkbox"/> |
| T | Threaded Outlet | <input type="checkbox"/> |
| X | Inside Caulk | <input type="checkbox"/> |

| Options | | |
|---------|--|--------------------------|
| Suffix | Description | |
| -6 | Vandal Proof | <input type="checkbox"/> |
| -13 | Galvanized Body | <input type="checkbox"/> |
| -15 | Strainer Extension (DD-50) | <input type="checkbox"/> |
| -34B | Brass Tapered Threaded Plug | <input type="checkbox"/> |
| -34G | Gas Tight ABS Expansion Plug (n/a) to 6" Connection) | <input type="checkbox"/> |
| -113M | Special Epoxy from 3M Range | <input type="checkbox"/> |
| -SO | Side Outlet | <input type="checkbox"/> |
| -Z | Elastomeric Flange | <input type="checkbox"/> |


| Optional Body Material (NH Only) | | |
|----------------------------------|--------------------------|--------------------------|
| Suffix | Description | |
| -60 | PVC Body w/Socket Outlet | <input type="checkbox"/> |
| -61 | ABS Body w/Socket Outlet | <input type="checkbox"/> |

| Load | |
|--------|--------|
| Suffix | Rating |
| US-1 | MD |

Chart A

| Pipe Size | Std. No Hub | P Push On | T Female Thread | X Inside Caulk | 60/61 PVC/ABS |
|-----------|-------------|-------------|-----------------|----------------|---------------|
| 2"(51) | 3-5/8"(92) | 4-1/4"(108) | 4-1/4"(108) | 4-1/2"(114) | 3-3/4"(95) |
| 3"(76) | 3-5/8"(92) | 4-1/4"(108) | 4-1/4"(108) | 4-1/2"(114) | 3-3/4"(95) |
| 4"(102) | 3-5/8"(92) | 4-1/4"(108) | 4-1/4"(108) | 4-1/2"(114) | 4"(102) |
| 6"(152) | 3-1/2"(89) | | | | |

Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.

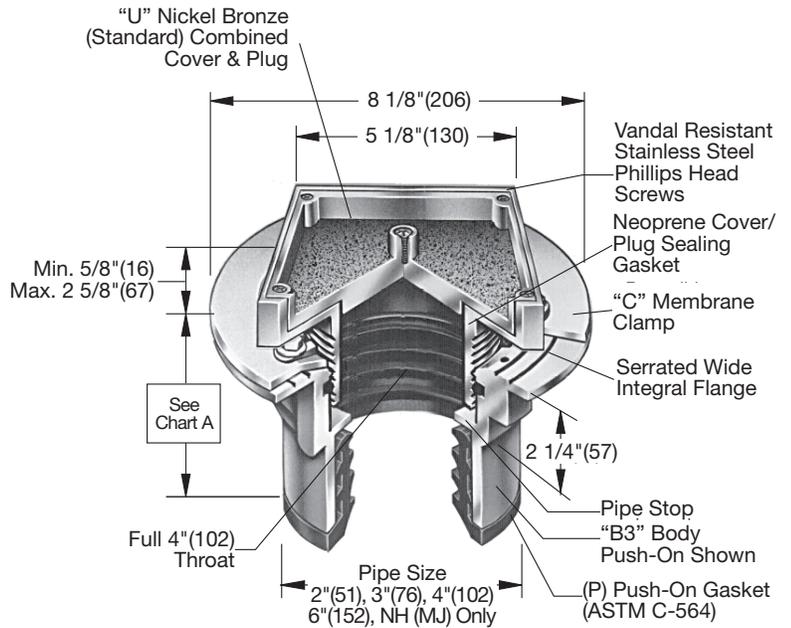

NOTICE

The load classifications are in accordance with the American National Standards A112.21.1M ASME Ratings are as follows:
 MD - Safe Live Load 2000-4999 lbs. (900-2250 kg)
 These categories are given as a guide only. Please consult factory.

NOTICE

The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of this product.



USA: T: (800) 338-2581 • F: (828) 248-3929 • Watts.com
 Canada: T: (888) 208-8927 • F: (905) 481-2316 • Watts.ca
 Latin America: T: (52) 55-4122-0138 • Watts.com