

Engineering Specification

Job Name _____

Contractor _____

Job Location _____

Approval _____

Engineer _____

Contractor's P.O. No. _____

Approval _____

Representative _____

Tag _____

FD-100-C-EF

Floor Drain With Round Funnel

Specification

Watts FD-100-C-EF epoxy coated cast iron floor drain with anchor flange, reversible membrane clamp with primary and secondary weepholes, 1/4"(6) thick (specify diameter) adjustable nickel bronze (standard) strainer, 4"(102) round nickel bronze (standard) funnel, and no hub (MJ) (standard) outlet.

Pipe Sizing		
Suffix	Description	
2	2"(51) Pipe Size	☐
3	3"(76) Pipe Size	☐
4	4"(102) Pipe Size	☐
6	6"(152) Pipe Size	☐

Outlet Type		
Suffix	Description	
NH	No Hub (MJ)	☐
P	Push On	☐
T	Threaded Outlet	☐
X	Inside Caulk	☐

Strainer		
Suffix	Description	
EF-1	5"(127) Dia., Nickel Bronze	☐
EF-50	5"(127) Dia., Cast Iron	☐

Optional Body Material		
Suffix	Description	
-60	PVC Body w/Socket Outlet	☐
-61	ABS Body w/Socket Outlet	☐

Options		
Suffix	Description	
-5	Sediment Bucket	☐
-6	Vandal Proof	☐
-8	Backwater Valve (3, 4" Only)	☐
-12	Galvanized Top	☐
-13	All Galvanized	☐
-15	Strainer Extension (DD-50)	☐
-113M	Special Epoxy from 3M Range	☐
-F4-50	4" Round Cast Iron Funnel	☐
-F4-1	4" Round Nickel Bronze Funnel	☐
-F6-1	6" Round Nickel Bronze Funnel	☐
-G-50	4x9" Oval Cast Iron Funnel	☐
-G-1	4x9" Oval Nickel Bronze Funnel	☐
-S0	Side Outlet	☐
-Z	Elastomeric Flange	☐

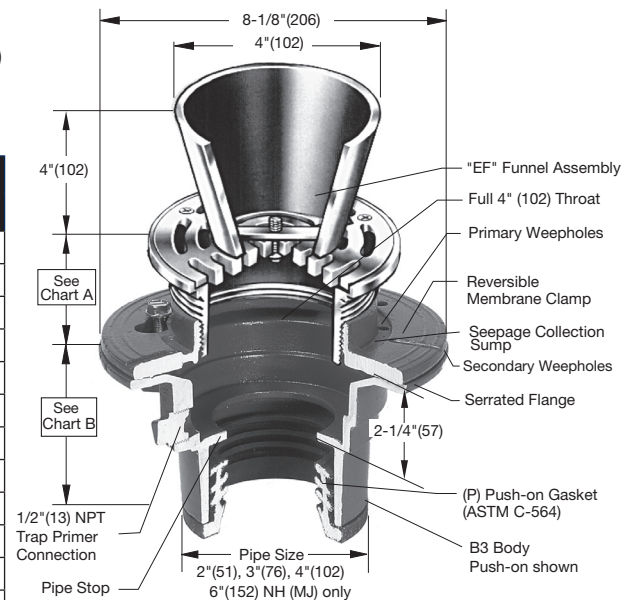


Chart A				
Str. Dia.	Min.	Max.	Load Rating	Free Area Sq. In.
5"(127)	13/16"(21)	2 1/2"(64)	NOT APPLICABLE	6

Chart B					
Pipe Size	Std. No Hub	P Push On	T Female Thread	X Inside Caulk	60/61 PVC/ABS
2"(51)	3 5/8"(92)	4 1/4"(108)	4 1/4"(108)	4 1/2"(114)	3-3/4"(95)
3"(76)	3 5/8"(92)	4 1/4"(108)	4 1/4"(108)	4 1/2"(114)	3-3/4"(95)
4"(102)	3 5/8"(92)	4 1/4"(108)	4 1/4"(108)	4 1/2"(114)	4"(102)
6"(152)	3 1/2"(89)				

NOTICE

The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of this product.

Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.



USA: T: (800) 338-2581 • Watts.com

Canada: T: (888) 208-8927 • Watts.ca

Latin America: T: (52) 55-4122-0138 • Watts.com

ES-WD-FD-100-C-EF-CAN 2238

© 2022 Watts