

Job Name \_\_\_\_\_  
 Job Location \_\_\_\_\_  
 Engineer \_\_\_\_\_  
 Approval \_\_\_\_\_


Contractor \_\_\_\_\_  
 Approval \_\_\_\_\_  
 Contractor's P.O. No. \_\_\_\_\_  
 Representative \_\_\_\_\_

# LEAD FREE\*

## HydroGuard® XP

### LFSH1434 Six Valve

#### Supply Fixture Wall Mount Cabinet

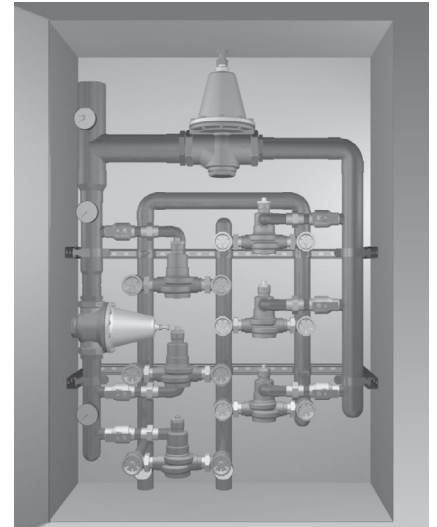

#### Features

- Features Lead Free\* construction to comply with Lead Free\* installation requirements.
- Paraffin-based advanced thermal actuation technology to sense and adjust outlet temperature
- Dirt and lime resistant poppet and seat design
- Virtual shutoff if supply pressure fails
- Vandal-resistant locking mechanism to secure temperature setting
- Factory tested as a complete unit
- Mounted on heavy-duty welded struts
- Stainless steel or white painted cabinets

#### Specifications

Connections . . . . . See ordering information  
 Maximum Hot Water Supply Temperature . . . . . 200°F (93°C)  
 Minimum Hot Water Supply Temperature\*\* . . . . . 5°F (3°C) Above Set Point  
 Minimum Flow\*\*\* . . . . . 0.5 gpm (1.9 lpm)  
 Maximum Operating Pressure . . . . . 125 psi (861 kPa)  
 Temperature Adjustment Range\*\*\*\* . . . . . 90 – 160°F (32 – 71°C)  
 Hot Water Inlet Temperature Range . . . . . 120 – 180°F (49 – 82°C)  
 Cold Water Inlet Temperature Range . . . . . 40 – 80°F (4 – 27°C)  
 Listing/Compliance (Valve Only) . . . . . ASSE 1017, CSA B125



Advanced Thermal Actuation



\* The wetted surface of this product contacted by consumable water contains less than one quarter of one percent (0.25%) of lead by weight.  
 \*\* With Equal Pressure  
 \*\*\* Minimum flow when Hi/Lo valve is installed at or near hot water source recirculating tempered water with a properly sized continuously operating recirculating pump.  
 \*\*\*\* Note: Low limit cannot be less than the cold water temperature. For best operation, hot water should be at least 5°F (3°C) above desired set point.

#### Capacity

Flow Capacity at 50-50 Mixed Ratio								
		Pressure Drop Across Valve						
Model	Min. Flow to ASSE 1017	Cv	5 psi (34 kPa)	10 psi (69 kPa)	20 psi (138 kPa)	30 psi (207 kPa)	45 psi (310 kPa)	60 psi (414 kPa)
LFSH1434-6V	1 gpm 4 lpm	126.3	282 gpm 1067 lpm	400 gpm 1514 lpm	565 gpm 2139 lpm	692 gpm 2620 lpm	847 gpm 3206 lpm	978 gpm 3702 lpm

Powers product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Powers Technical Service. Powers reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Powers products previously or subsequently sold.

## Dimensions

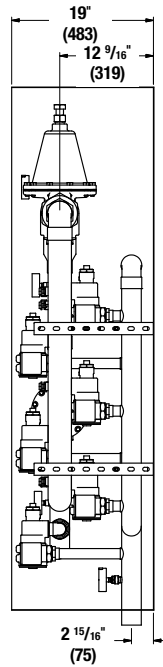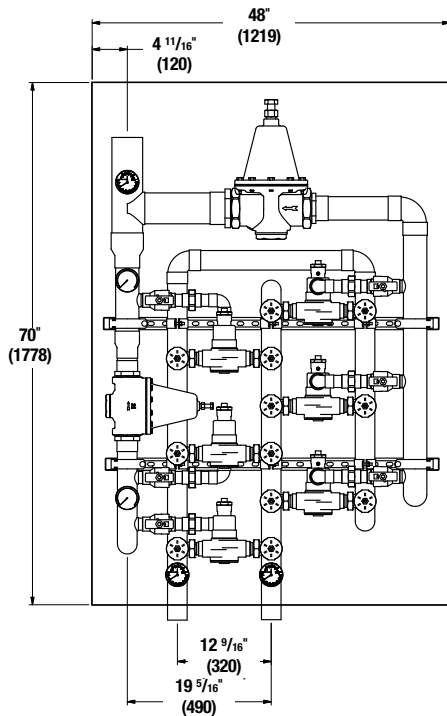

Note:  
Dimensions are shown  $\pm 1/2$ "  
Dimensions in parentheses  
are in mm

## Ordering Information

L F S H 1 4 3 4 6 V A E 0

Valve	Inlets	Outlet	Order Code
-------	--------	--------	------------

Six Valve	2-1/2" (65mm)	4" (100mm)	6V
-----------	---------------	------------	----

### Finish

Rough Bronze

A

### Piping

Bottom/Top

E

### Cabinets

Stainless Steel, Wall Mount

Painted Steel, Wall Mount

Q

U

### Alarm

None

0

## Recirculation Piping Diagram

Please see Piping Diagram Section of this catalog.

## Typical Specification

Six Valve Hi/Lo Temperature Control System should include six thermostatic valves capable of maintaining water temperature to within the range of 90 – 160°F (32 – 71°C). Valves must compensate for fluctuations due to inlet water temperature changes. The valves shall be constructed using Lead Free\* brass. Valves shall comply with state codes and standards, where applicable, requiring reduced lead content. Valves shall have triple-duty checkstops and must have advanced, paraffin-based thermal actuation technology in order to guarantee a precise control when tested in accordance with ASSE 1017 and CSA B125. Thermostatic valves must be ASSE listed and CSA approved. Six Valve Hi/Lo system must include PRV, ball valves, pressure/temperature gauges and mounted on heavy-duty metal struts. It shall also include a stainless steel or painted steel cabinet.

The Hi/Lo system shall be of Powers' Six Valve Hi/Lo Model \_\_\_\_\_. Any alternate must have a written approval prior to bidding.

# POWERS™

A WATTS Brand

USA: Tel: (800) 669-5430 • Fax: (847) 229-0526 • PowersControls.com

Canada: Tel: (905) 332-4090 • Fax: (905) 332-7068 • PowersControls.ca

Latin America: Tel: (52) 81-1001-8600 • PowersControls.com